


# INSTALLATION INSTRUCTIONS

## CH11 TIE CLIP

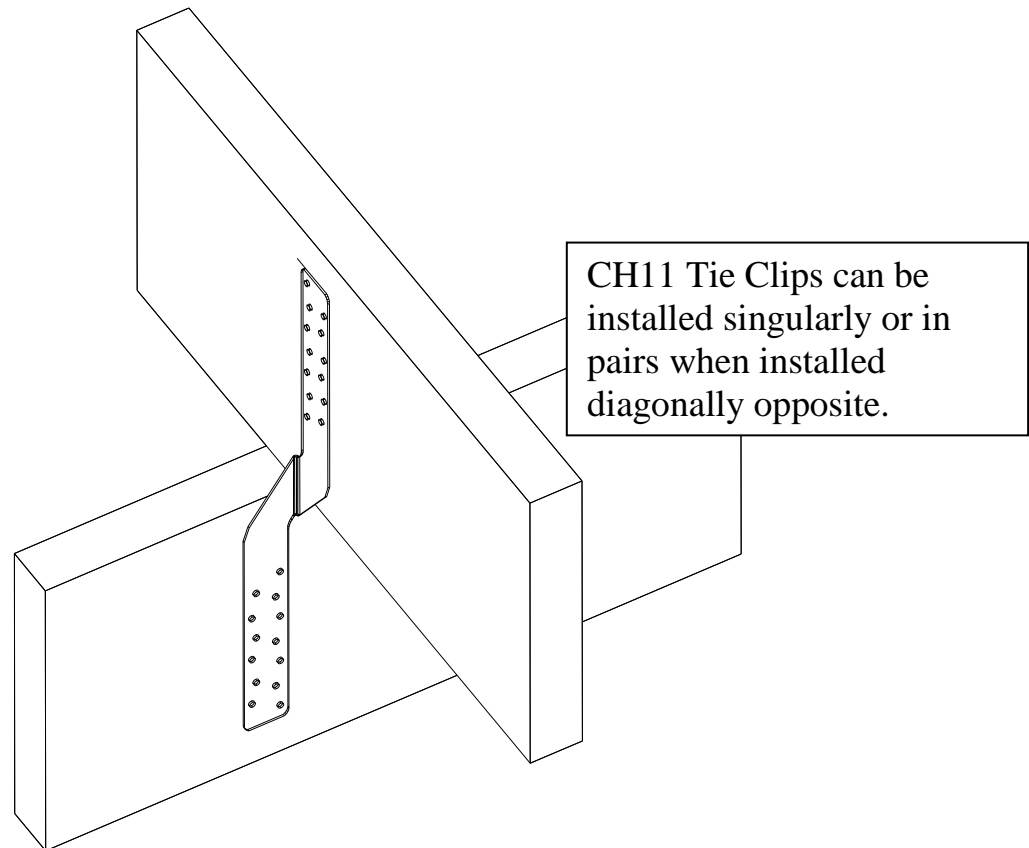

Align each leg of the CH11 Tie Clip flush with the face of the rafter and the top plate. Use a minimum of twelve (six in each leg) #8 wood screws or 8d nails in centermost holes in Southern Yellow Pine. Galvanized fasteners required in HVHZ of Florida.

CH Machine Corporation  
P.O. Box 588  
Vernon, Alabama 35592  
205-695-0094  
chmachineinc.com